


PLATINUM DPC II-10A Wi-Fi Connection



APPLICATION

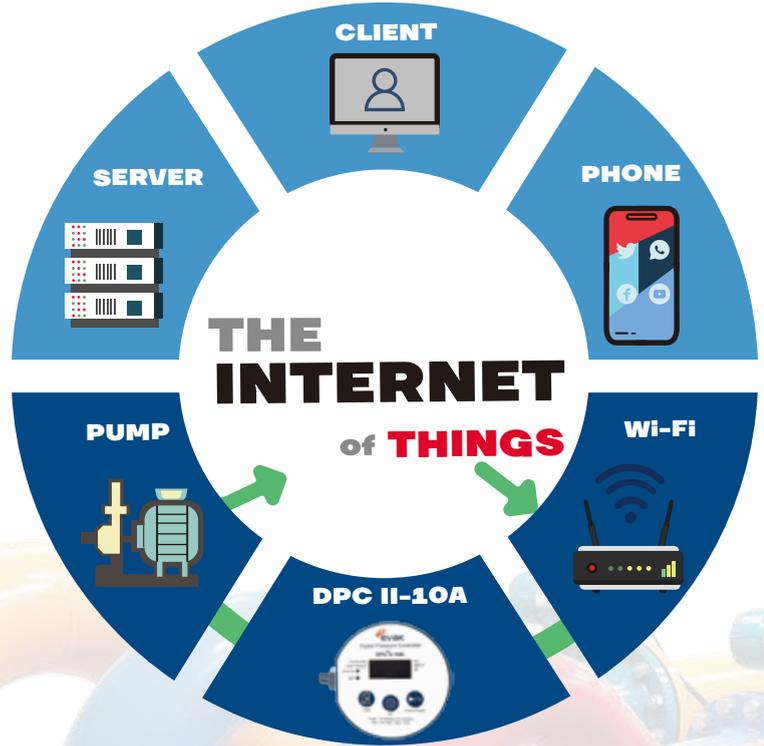

FEATURE



- DPC II-10A now enters the stage of IOT through Wi-Fi connectivity your operation can be monitored and operate in anytime anywhere no more distance limitation
- Data cloudization proactive alerting smart analysis makes the App more friendly to users
- Comprehensive business service functions such as push notification remote service and distribution system management on after sales service
- The statistics for startup times and operation time
- Automatically warning of water suspended network connection status
- Abnormality of startup times and operation time


TECHNICAL DATA

Power Supply	110~230Vac±10% 50/60hz
Pressure Connection	R 1/4"
Accuracy	±1% Tolerance
Overload Capacity	Tested to 1.5 x the rated pressure
Output of Relay	ON/OFF
Relay Capacity (Maximum Motor Size)	110V up to 1HP (0.75kW) 230V up to 2HP (1.5kW)
Maximum Current	12A
Sampling Rate	5 times/second
Working Temperature	-10°~65°C
Ingress Protection	IP55
Display Pressure Unit	bar,psi, kgf/cm ²
Ph Level	6-9

MODEL SELECTION

Model	Working Pressure	Enclosure Size	Port Material
DPC II-10A	10 BAR	3 1/2"	NICKEL BRASS

DIMENSION

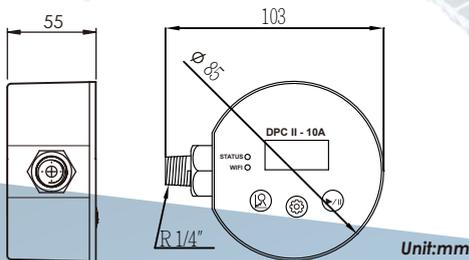

Stability

Power supply module and relay upgrade. Improving life expectancy



APP

Remote control to DPC II-10A Support iOS and Android



Service

One touch to acquire maintenance contact, support remote troubleshoot service



Analysis

Know your operating history to troubleshoot and improve energy



Alarm

Abnormal status notification Ex. Dry run, sensor failure, etc



Wi-Fi

Connectivity to DPC II-10A