
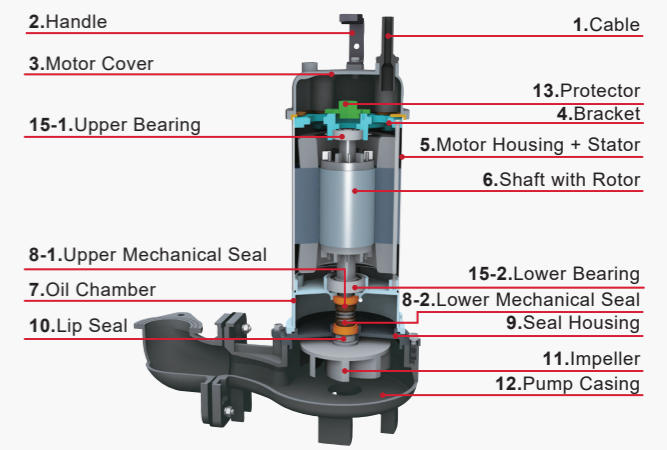




Section View

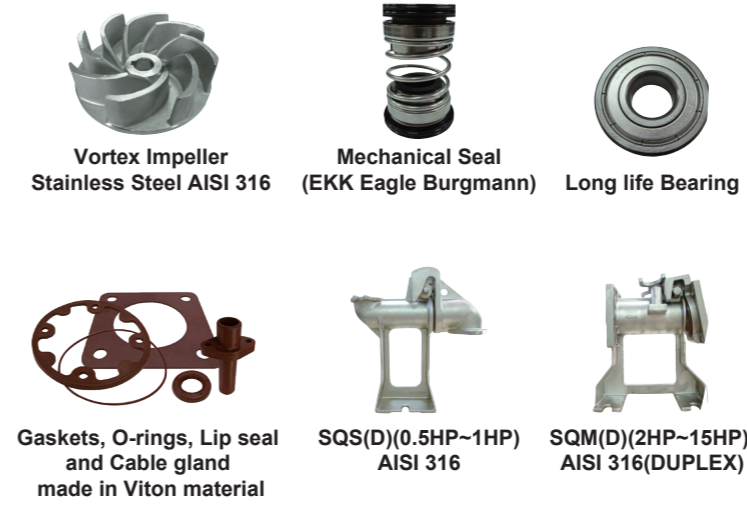

Dimensions (mm)

Type	A	A1	A2	A3	B	B1	B2	H	H1	H2	H3
50STEEL-6.05	228	75	120	N/A	150	70	80	425	297	117	138
50STEEL-6.10	228	75	120	N/A	150	70	80	455	327	117	138
50(80)STEEL-6.20	390	103	235	154	208	104	104	532	400	150	152
50(80)STEEL-6.30S(T)	390	103	235	154	208	104	104	572(552)	440(420)	150	152
80(100)STEEL-6.50	466	100	274	177	210	95	115	633	468	160	225
80(100)STEEL-6.75	466	100	274	177	210	95	115	673	508	160	225
80(100)STEEL-6.100	488	125	270	176	251	125	127	630	515	181	261
80(100)STEEL-6.150	488	125	270	176	251	125	127	680	565	181	261


» Note1 : S: Single Phase ; T: Three Phase
 » Note2 : Automatic models are available in single-phase versions(0.5-3HP).
 » Note3 : Q.D.C. (Quick Discharge Connection) is available for all models.

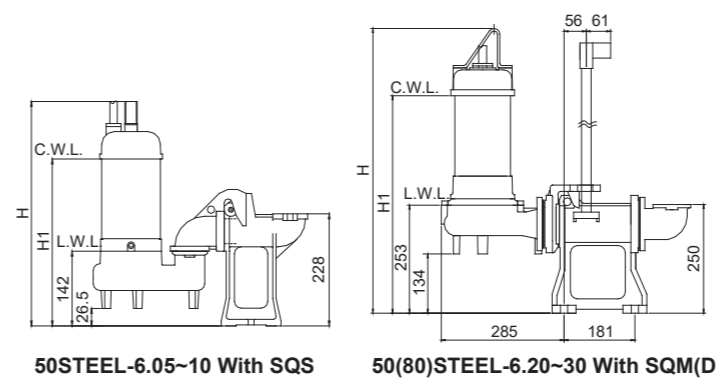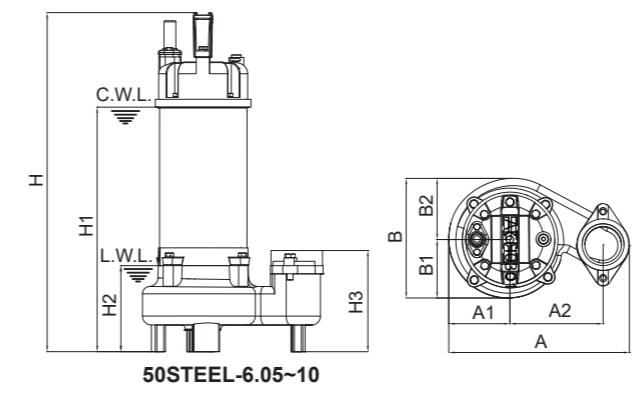

STEEL with SQS/SQM(D)

Type	Output		Discharge		Dimensions(mm)	
	HP	KW	Inch	mm	H	H1
STEEL with SQS	0.5	0.37	2"	50	445	322
	1	0.75	2"	50	475	352
	2	1.5	2"(3")	50(80)	660	534
STEEL with SQM(D)	3	2.2	2"(3")	50(80)	S:710;T:690	S:574;T:554
	5	3.7	3"(4")	80(100)	739	574
	7.5	5.5	3"(4")	80(100)	779	614
	10	7.5	3"(4")	80(100)	736	620
	15	11	3"(4")	80(100)	786	670

Performance Curve

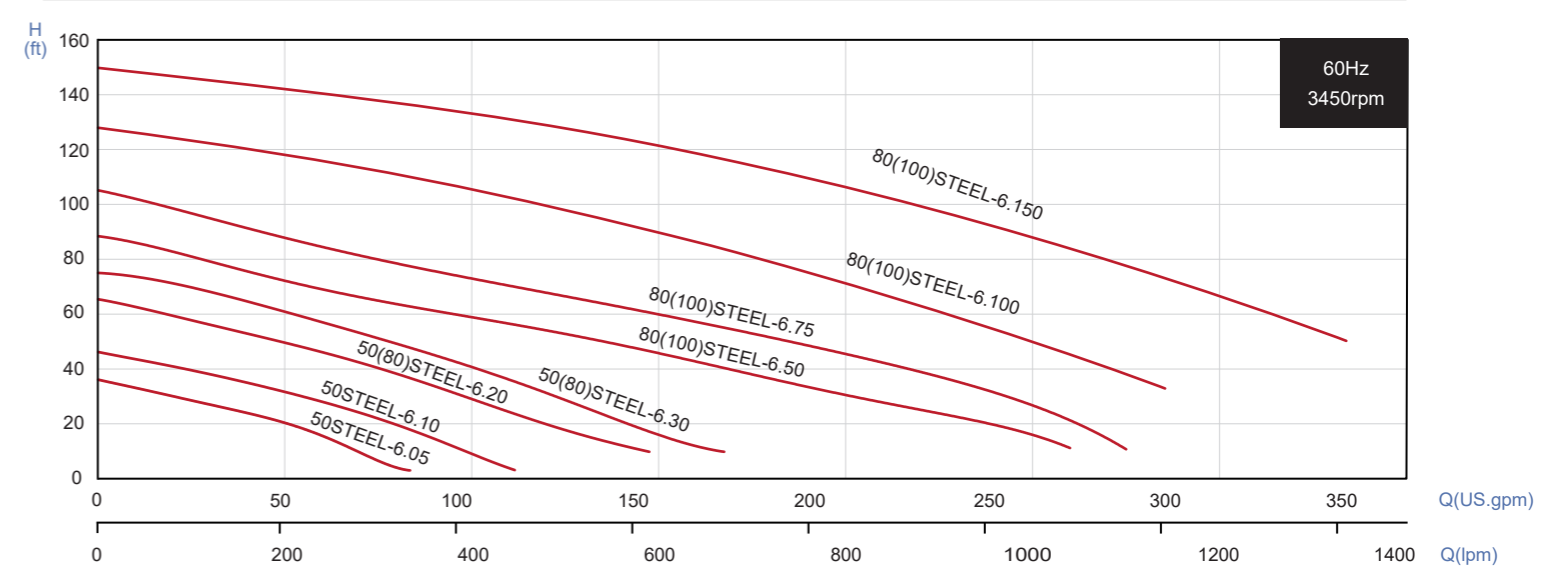

All technical information is subject to change without notice.

STAINLESS STEEL AISI 316(L) & DUPLEX STEEL SUBMERSIBLE VORTEX SEWAGE PUMP

STEEL

SERIES 60HZ



50(80)STEEL-6.20~30 50STEEL-6.05~15 50STEEL-6.05~10
 Watertight Corrugated Cable Sleeve (optional)
 Acid/Alkali Resistant Plastic Composite Material

Features

- Vortex impeller design
- Loss wax Stainless Steel AISI 316(L) & DUPLEX STEEL
- Large impeller clearance
- Viton gaskets, o-rings and lip seal are used throughout pump sealing
- Optional epoxy based nano-coating to extend pump life time
- Optional acid/alkali resistant cable sleeve

Applications

- Drainage for typical, chemical, pharmaceutical industries
- Wastewater with corrosive contaminant
- Wastewater treatment plant

Data Chart

Specifications

Liquid Temperature	0~40°C (32~104°F)
Submersible depth	10M
Frequency	60Hz
Pole	2 Pole
Type	Dry Type
Insulation	0.5~7.5HP : Class B 10~15HP : Class F
Protection	IP 68
Protector	Auto-cut
Bearing	Ball Type
Mechanical seal	Double Mechanical Seal
Impeller	Vortex Impeller

Type	Output		Discharge	F.L.A.			Rated		Maximum		Free Passage	Weight(W/O Cable)		Q.D.C.
	HP	KW		1ø	3ø	3ø	Head FT	Cap. GPM	Head FT	Cap. GPM		mm	1ø-kg	
50STEEL-6.05	0.5	0.37	2"	4A	2.8A	1.4A	19.7	55	36	88	35	13	12.4	SQS-50
50STEEL-6.10	1	0.75	2"	6A	4A	2A	29.5	60	46	118	35	15.4	15.7	SQS-50
50(80)STEEL-6.20	2	1.5	2"(3")	11A	7A	3.5A	36	90	65.5	155.8	45	31.2	29.7	SQM-80(D)
50(80)STEEL-6.30	3	2.2	2"(3")	11A	8A	4.5A	39	110	75.5	177	45	32.8	31.3	SQM-80(D)
80(100)STEEL-6.50	5	3.7	3"(4")	-	15A	8A	56	120	88.5	275	45	-	48	SQM-100(D)
80(100)STEEL-6.75	7.5	5.5	3"(4")	-	21A	10.5A	64	145	105	290.5	45	-	53.8	SQM-100(D)
80(100)STEEL-6.100	10	7.5	3"(4")	-	26.7A	13.7A	82	185	125	300	34	-	71.5	SQM-100(D)
80(100)STEEL-6.150	15	11	3"(4")	-	38.3A	19A	109	200	150	352	25	-	81.5	SQM-100(D)

» 50STEEL-6.05~10 : Flange Type » 50(80)STEEL-6.20~30 : Elbow Type » 80(100)STEEL-6.50~150 : Elbow Type (D) Identifies Duplex Material is optional for SQM to choose.